

MEREDITH

APPLICATION

- Parks and Gardens, Area Lightings, Street Lighting

TECHNICAL INFO

- Made of aluminum, polyester powder coated with optional finishes and various RAL colors, silicon gasket, and tempered glass or polycarbonate diffusers and tempered glass diffuser.
- IP 65 protection
- IK08 mechanical resistance
- class I Electrical Protection
- Pole top mount or pole side mount, Ø 60 mm spigots tiltable
- LED light source, 220-240 V (50-60 Hz)
- Control System (optional): 1-0V, DALI, none (optional)
- Surge protection (optional): 2kv-6kv-10kv
- Operating temperature: -25°C / +55°C

FINISHING



- Polyester Powder Coating finish available in RAL Colors



40 - 120 Watt
Compatible



Asymmetrical
Symmetrical

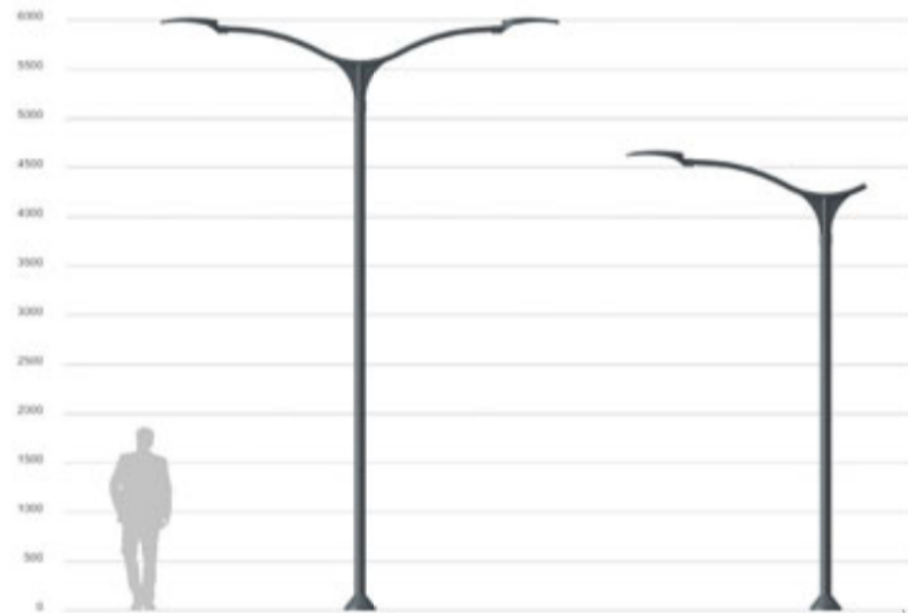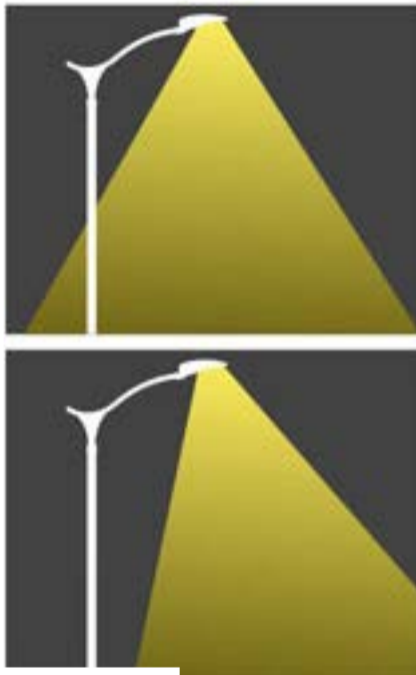

Product	Power	Lumen Output	ColorTemp.
MEREDITH	40W	3760/ 3888 lm	3000K/4000K
MEREDITH	60W	6258 / 6453 lm	3000K/4000K
MEREDITH	90W	9477 / 9769 lm	3000K/4000K
MEREDITH	120W	12636 / 13026 lm	3000K/4000K

"CRI>70: Power Factor >95, Drive current 350 ma-1050ma

