



elumininaire

# ELLPSR1 Series Led Floods





# ELLPSR 1 Series

90-300 W 125 lm/W



5 YEARS WARRANTY



5-STEP TIMING



MOTION SENSOR



DAYLIGHT SENSOR



ZIGBEE



Gövde Body	Alüminyum Enjeksiyon Aluminium Injection
LED	Osram, Seoul , Lumileds
Lens	Polimer Enjeksiyon PMMA Polymer Injection PMMA
Optik Kapak Diffuser	IK08 - Temperli Cam Clear Tempered Glass
Sürücü Driver	MOSO, Meanwell 5 Yıl Garantili 5 Years Warranty

Giriş Gerilimi Input Voltage [V]	220-240 VAC
Renksel Geri Verim İndeksi CRI	>70
Güç Faktörü Power Factory	> 0.95
Frekans Frequency [Hz]	47-60
IP Koruması IP Protection	IP66

## Genel Özellikler ;

- U Braket veya Özel Braketlerle montaj avantajı
- Toz ve neme karşı IP66 koruma
- Hızlı, kolay ve aletsiz montaj
- 5 Farklı Optik Seçenek
- EN 62471:2008 Standartında UV Radyasyon Riski yoktur.
- Fotobiyolojik risk yoktur.
- Yukarı ışık dağılımı yoktur.
- Isı ve yüksek voltaj korumalı LED Sürücü
- Değiştirilebilir LED Modülü
- Değiştirilebilir LED Sürücü
- Yüksek dayanıklı alüminyum enjeksiyon gövde
- Ayarlanabilir konsol açısı; 0 117 veya 0 -117
- Civa ve benzeri metaller içermez.
- Bağlantı parçaları paslanmaz çeliktir.
- Uzaktan yönetim sistemleri uyumlu DALI sürücüsü

## Features ;

- Mounting advantage with u bracket or special brackets
- IP66 protect against dust and moisture
- Quick, easy and toolless installation
- 5 different optical options
- There is no risk of UV radiation according to EN 62471:2008 Standard.
- No photo-biological risks
- No upwards dispersion of the luminous flux.
- Thermal and high voltage protected drivers
- Replaceable LED Module
- Replaceable LED driver
- High strength aluminium injection body
- Adjustable console angles ; 0 to 117 or 0 to -117
- No contain mercury or similar metals
- All fittings used are in stainless steel
- DALI Driver compatible with remote management systems





### Armatür Güçleri / Product Code

Ürün Kodu Product Code	Güç [W] Power	Işık Akısı [lm] Luminous Flux	Renk Sıcaklığı [K] Colour Temp.	Optik Optic	Koli Adeti Pcs / Pack	Koli Ölçüleri [mm] Package Dimensions	Koli Ağırlığı [Kg] Package Weight.
ELLPSR1-AC-144S-90-(XXXX/XX)	90	12.000	3000-6500 K	30,45,60,90,AS	1	335x310x190 mm	7
ELLPSR1-AC-144S-100-(XXXX/XX)	100	13.500	3000-6500 K	30,45,60,90,AS	1	335x310x190 mm	7
ELLPSR1-AC-192S-120-(XXXX/XX)	120	15.600	3000-6500 K	30,45,60,90,AS	1	335x310x190 mm	7
ELLPSR1-AC-192S-150-(XXXX/XX)	150	19.500	3000-6500 K	30,45,60,90,AS	1	335x310x190 mm	7
ELLPSR1-AC-288S-200-(XXXX/XX)	200	25.000	3000-6500 K	30,45,60,90,AS	1	670x310x190 mm	14
ELLPSR1-AC-284S-250-(XXXX/XX)	250	31.500	3000-6500 K	30,45,60,90,AS	1	670x310x190 mm	14
ELLPSR1-AC-384S-300-(XXXX/XX)	300	37.500	3000-6500 K	30,45,60,90,AS	1	670x310x190 mm	14

# Ölçüler



## Dimensions

90 - 150 W için Ölçüler  
90 to 150 W for Dimensions

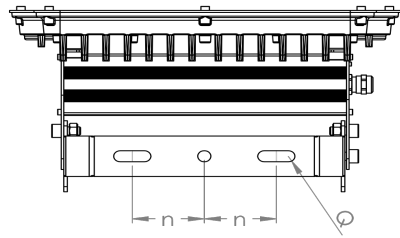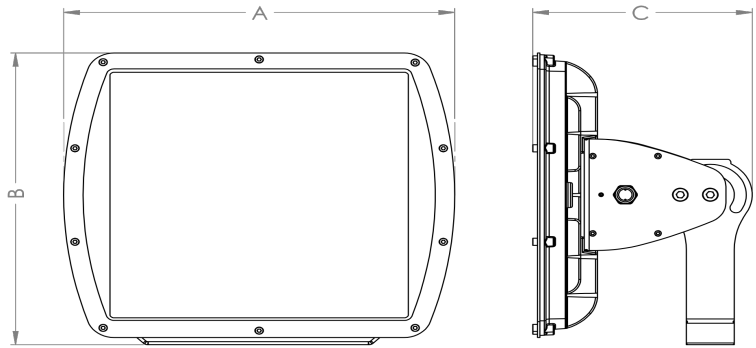

A	B	C	n	Q
325 mm	300 mm	180 mm	60 mm	11 mm


200 - 3000 W için Ölçüler  
200 to 300 W for Dimensions

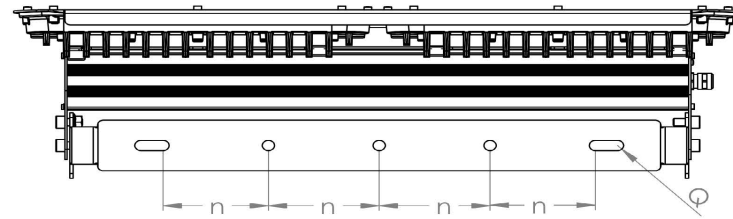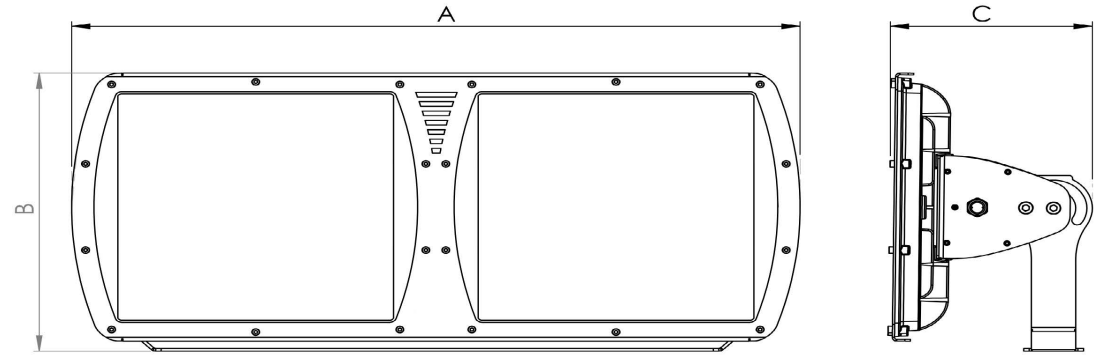

A	B	C	n	Q
660 mm	300 mm	180 mm	100 mm	11 mm


Kolaylaştırılmış Montaj Braketi  
Montaj raketi kolay montaj yapmanız için tasarlanmıştır.  
Böylece zaman ve maddi tasarruf sağlar.

**Easy Mounting Bracket**  
The mounting paddle is designed for easy mounting.  
Thus it saves time and material.

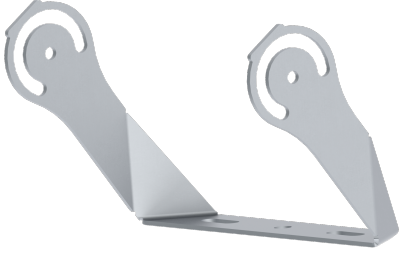


235 Dereceye kadar ayarlanabilir açı ayarı

**Adjustable angle adjustment to 235 degrees**

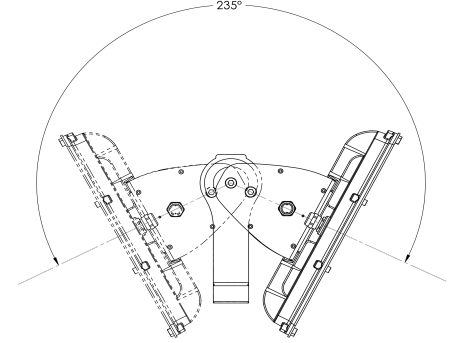


**Optik Seçenekleri**  
Yüksek geçirgenlikte optik lens en verimli kullanım için tasarlanmıştır.  
Sararma yapmaz özelliğindedir.  
Uygun optik yapı ile ışığı en iyi şekilde kullanın.

**Optic options**  
The high transmittance optical lens is designed for the most efficient use. Does not make yellowing.  
Make the most of the light with the appropriate optical structure.

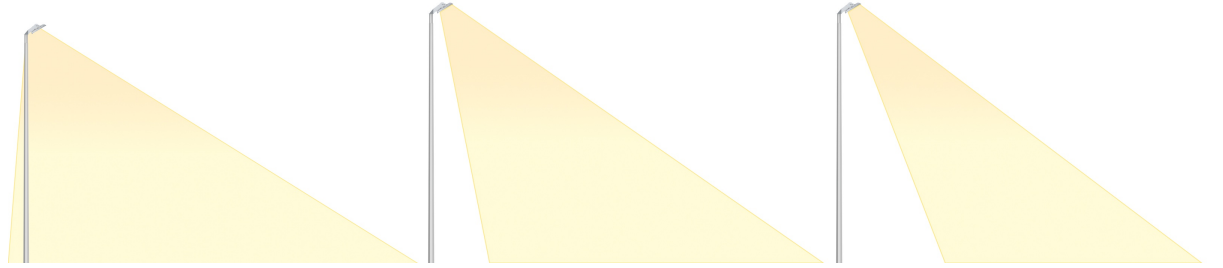




**Akıllı Kontrol**  
1-10 V Dim ,DALI Kontrol, Timer, Karanlık Sensörü çözümleri vardır.

**Intelligent Control**  
1-10V dimming, DALI Control, Timmer, Daylight Sensor solution.

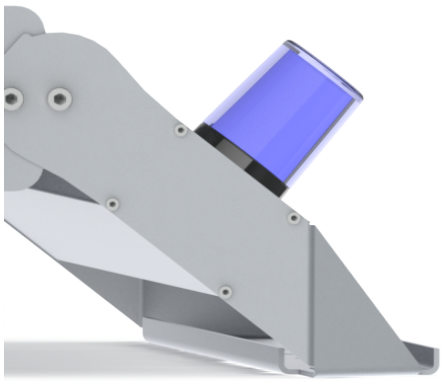




# Paketleme

## Packing Layout

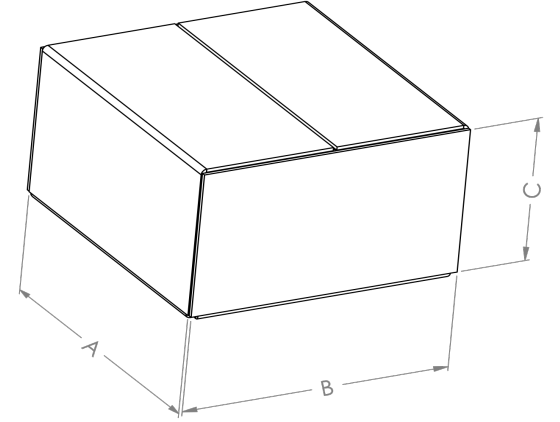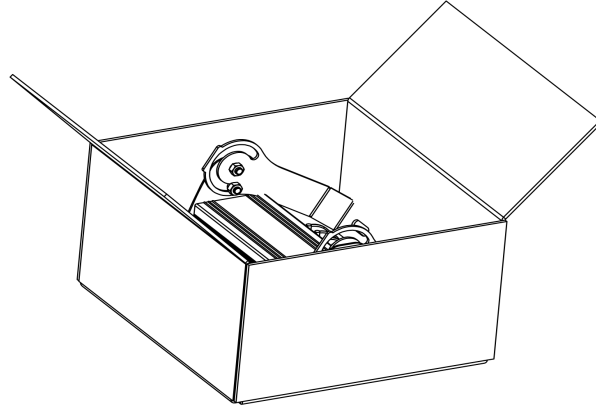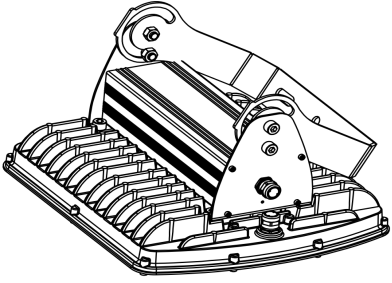

Kutu Ölçüleri  
Package Size

335 mm x 310 mm x 190 mm. 1 Adet Ürün / Pcs Product

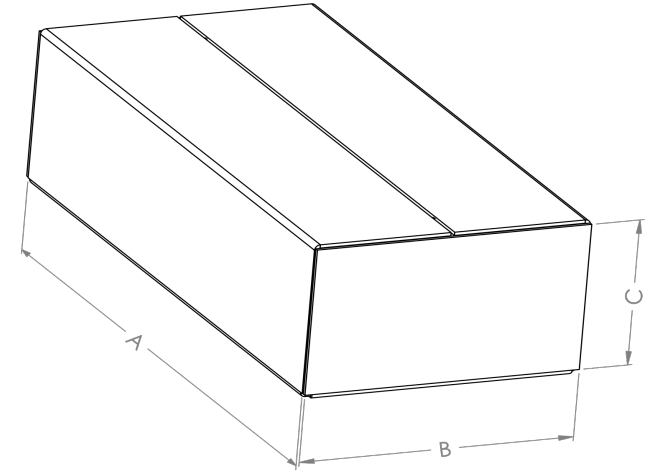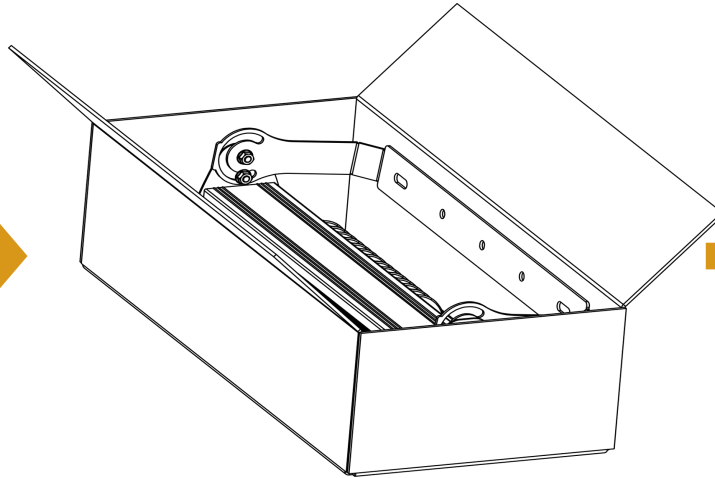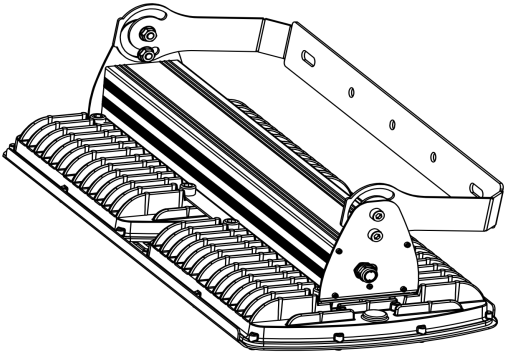

Kutu Ölçüleri  
Package Size

670 mm x 310 mm x 190 mm. 1 Adet Ürün / Pcs Product